

# **CSE 613: Parallel Programming**

## **Lecture 8**

### **( Analyzing Divide-and-Conquer Algorithms )**

**Rezaul A. Chowdhury**

**Department of Computer Science**

**SUNY Stony Brook**

**Spring 2012**

## A Useful Recurrence

Consider the following recurrence:

$$T(n) = \begin{cases} \Theta(1), & \text{if } n \leq 1, \\ aT\left(\frac{n}{b}\right) + f(n), & \text{otherwise;} \end{cases}$$

where,  $a \geq 1$  and  $b > 1$ .

Arises frequently in the analyses of *divide-and-conquer* algorithms.

Recall the following from the analyses of QSort (quicksort) in lecture 1.

**Serial:**  $T(n) = 2T\left(\frac{n}{2}\right) + \Theta(n)$

**Parallel (with serial partition):**  $T(n) = T\left(\frac{n}{2}\right) + \Theta(n)$

**Parallel (with parallel partition):**  $T(n) = T\left(\frac{n}{2}\right) + \Theta(\log n)$

## How the Recurrence Unfolds

$$T(n) = \begin{cases} \Theta(1), & \text{if } n \leq 1, \\ aT\left(\frac{n}{b}\right) + f(n), & \text{otherwise.} \end{cases}$$


## How the Recurrence Unfolds

$$T(n) = \begin{cases} \Theta(1), & \text{if } n \leq 1, \\ aT\left(\frac{n}{b}\right) + f(n), & \text{otherwise.} \end{cases}$$

$$\begin{array}{c} T(n) \\ \downarrow \\ f(n) + aT\left(\frac{n}{b}\right) \end{array}$$


## How the Recurrence Unfolds

$$T(n) = \begin{cases} \Theta(1), & \text{if } n \leq 1, \\ aT\left(\frac{n}{b}\right) + f(n), & \text{otherwise.} \end{cases}$$

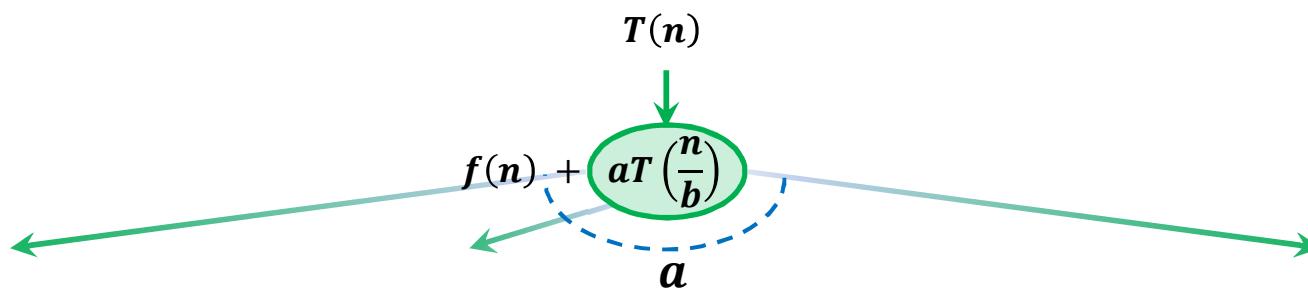


# How the Recurrence Unfolds

$$T(n) = \begin{cases} \Theta(1), & \text{if } n \leq 1, \\ aT\left(\frac{n}{b}\right) + f(n), & \text{otherwise.} \end{cases}$$

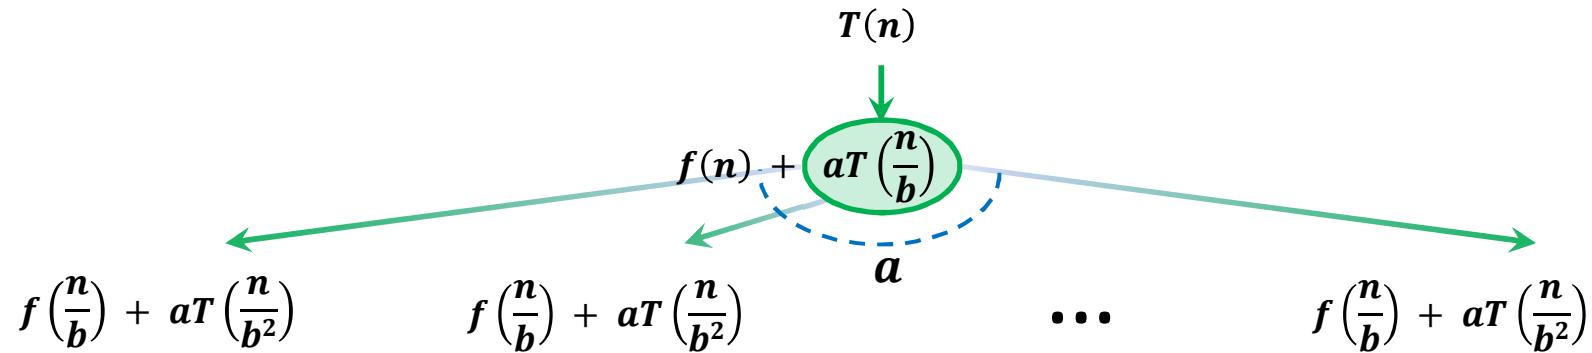


# How the Recurrence Unfolds

$$T(n) = \begin{cases} \Theta(1), & \text{if } n \leq 1, \\ aT\left(\frac{n}{b}\right) + f(n), & \text{otherwise.} \end{cases}$$

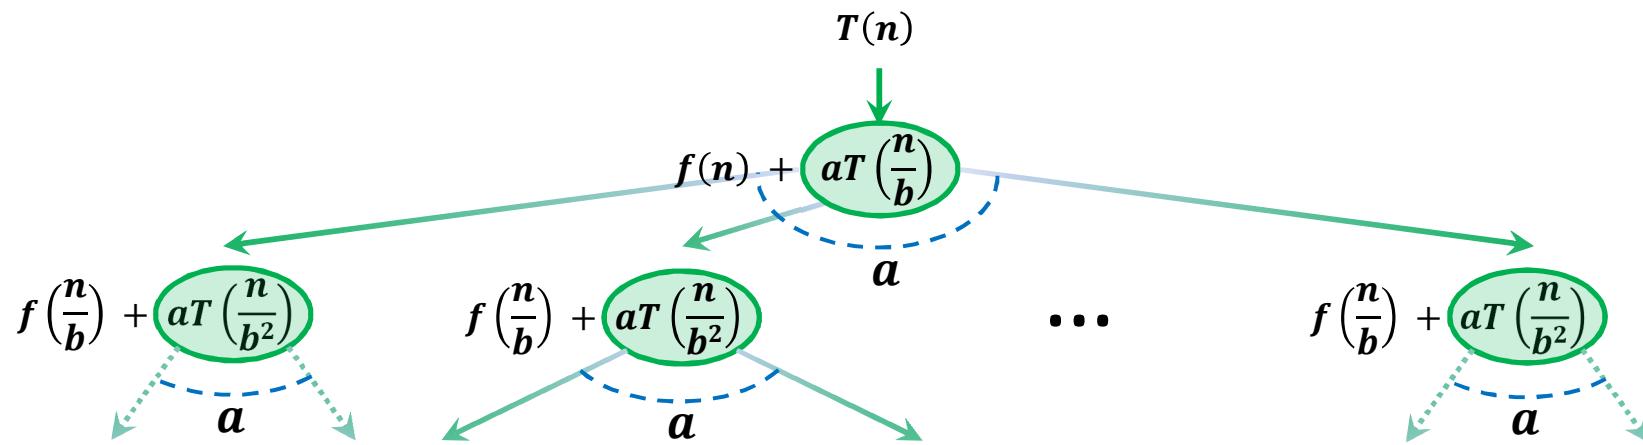


# How the Recurrence Unfolds

$$T(n) = \begin{cases} \Theta(1), & \text{if } n \leq 1, \\ aT\left(\frac{n}{b}\right) + f(n), & \text{otherwise.} \end{cases}$$

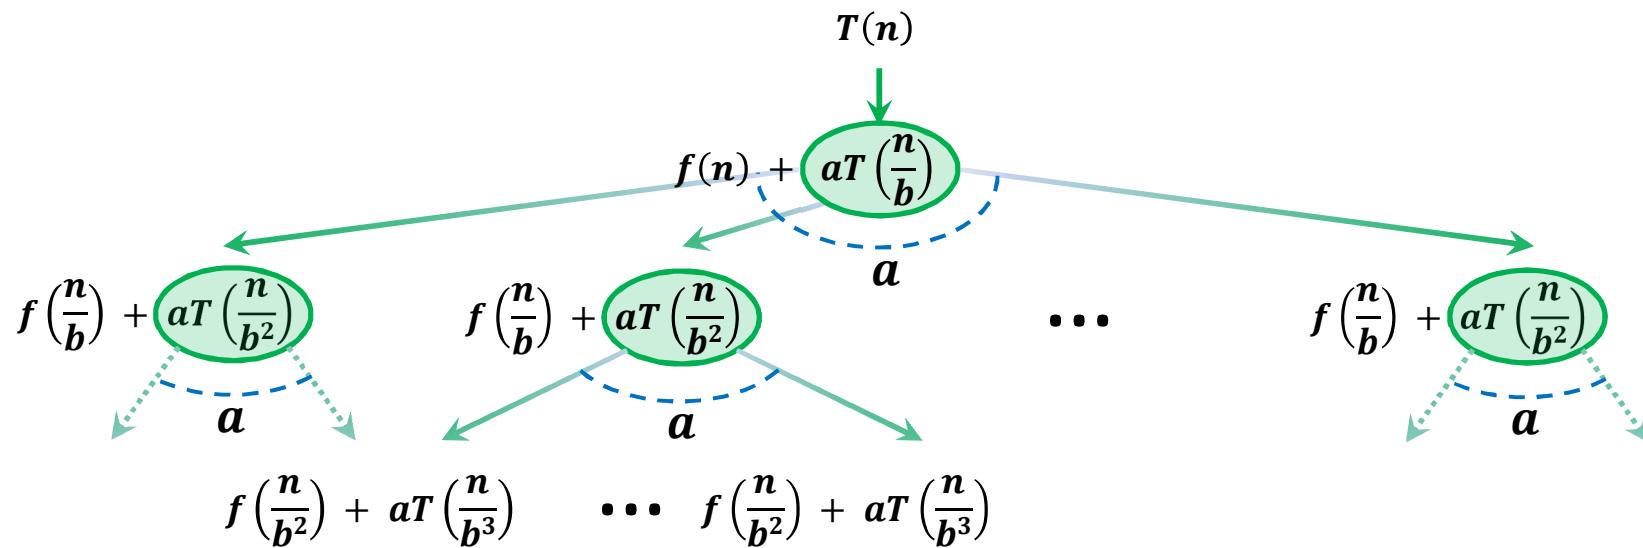


# How the Recurrence Unfolds

$$T(n) = \begin{cases} \Theta(1), & \text{if } n \leq 1, \\ aT\left(\frac{n}{b}\right) + f(n), & \text{otherwise.} \end{cases}$$

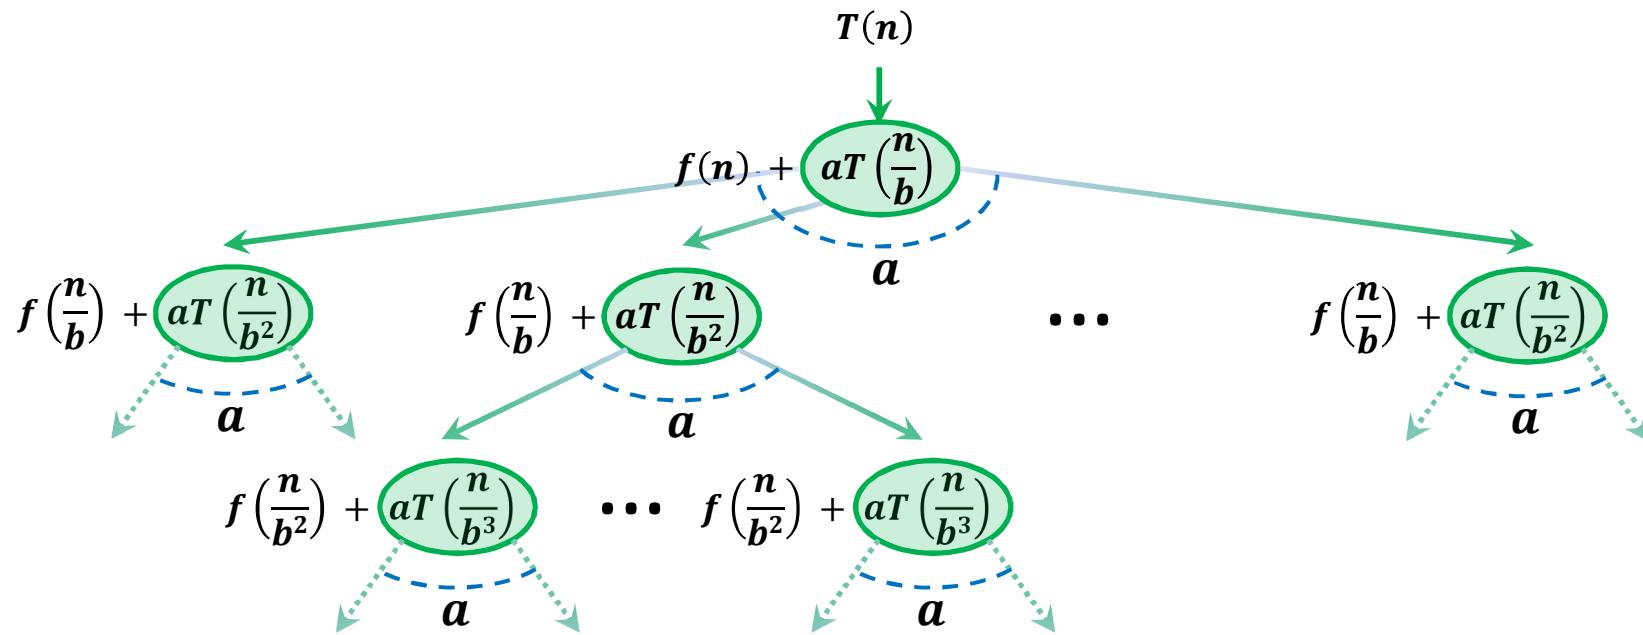


# How the Recurrence Unfolds

$$T(n) = \begin{cases} \Theta(1), & \text{if } n \leq 1, \\ aT\left(\frac{n}{b}\right) + f(n), & \text{otherwise.} \end{cases}$$

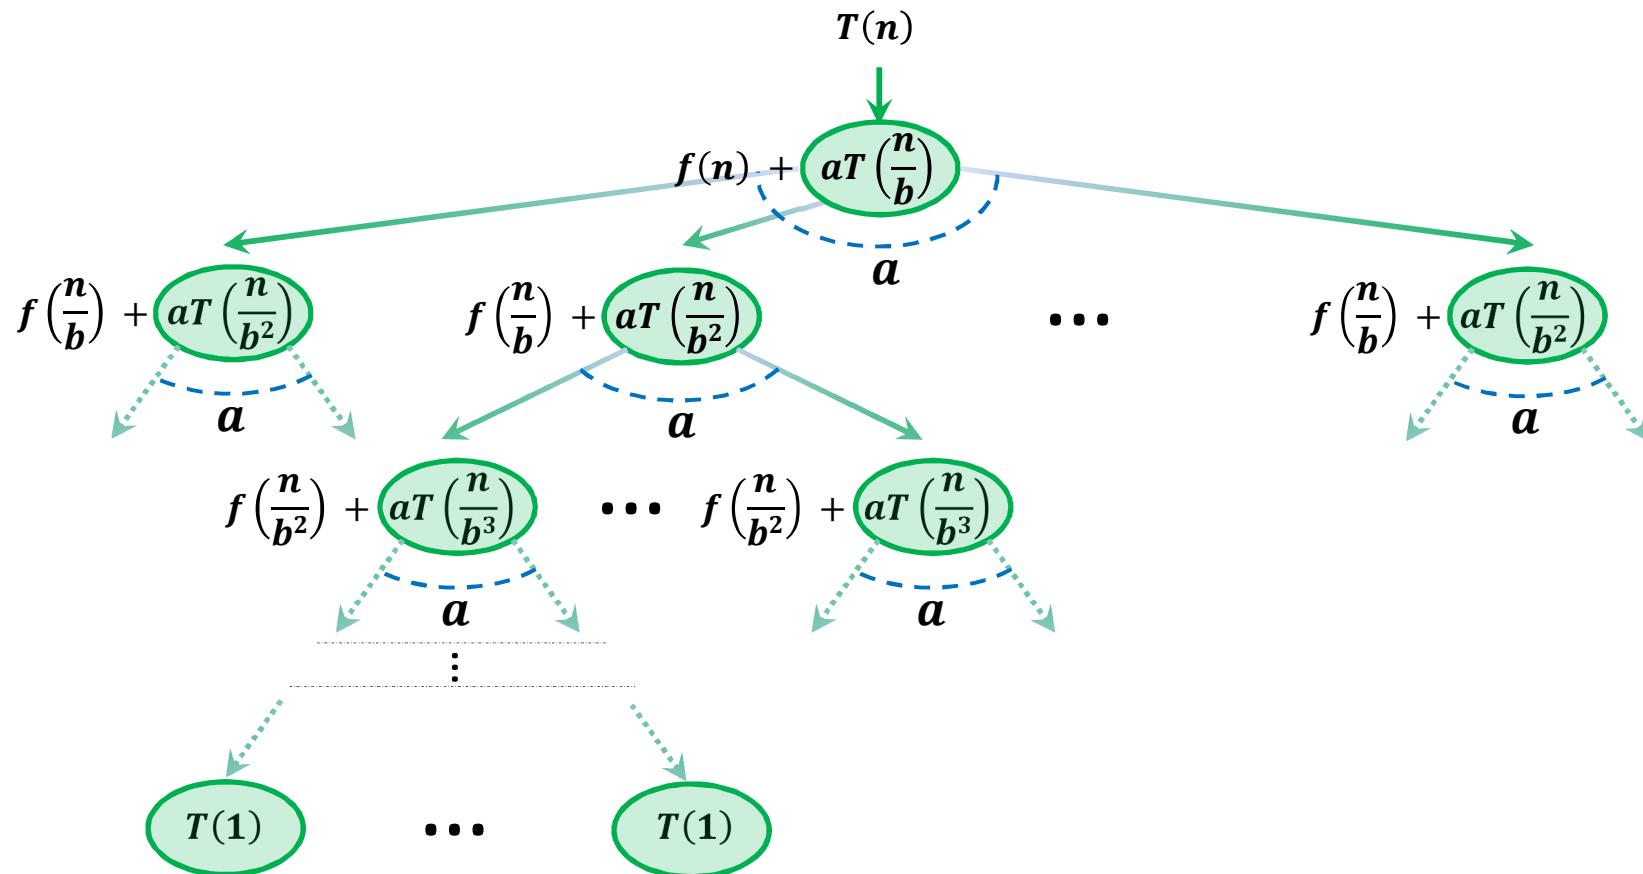


# How the Recurrence Unfolds

$$T(n) = \begin{cases} \Theta(1), & \text{if } n \leq 1, \\ aT\left(\frac{n}{b}\right) + f(n), & \text{otherwise.} \end{cases}$$

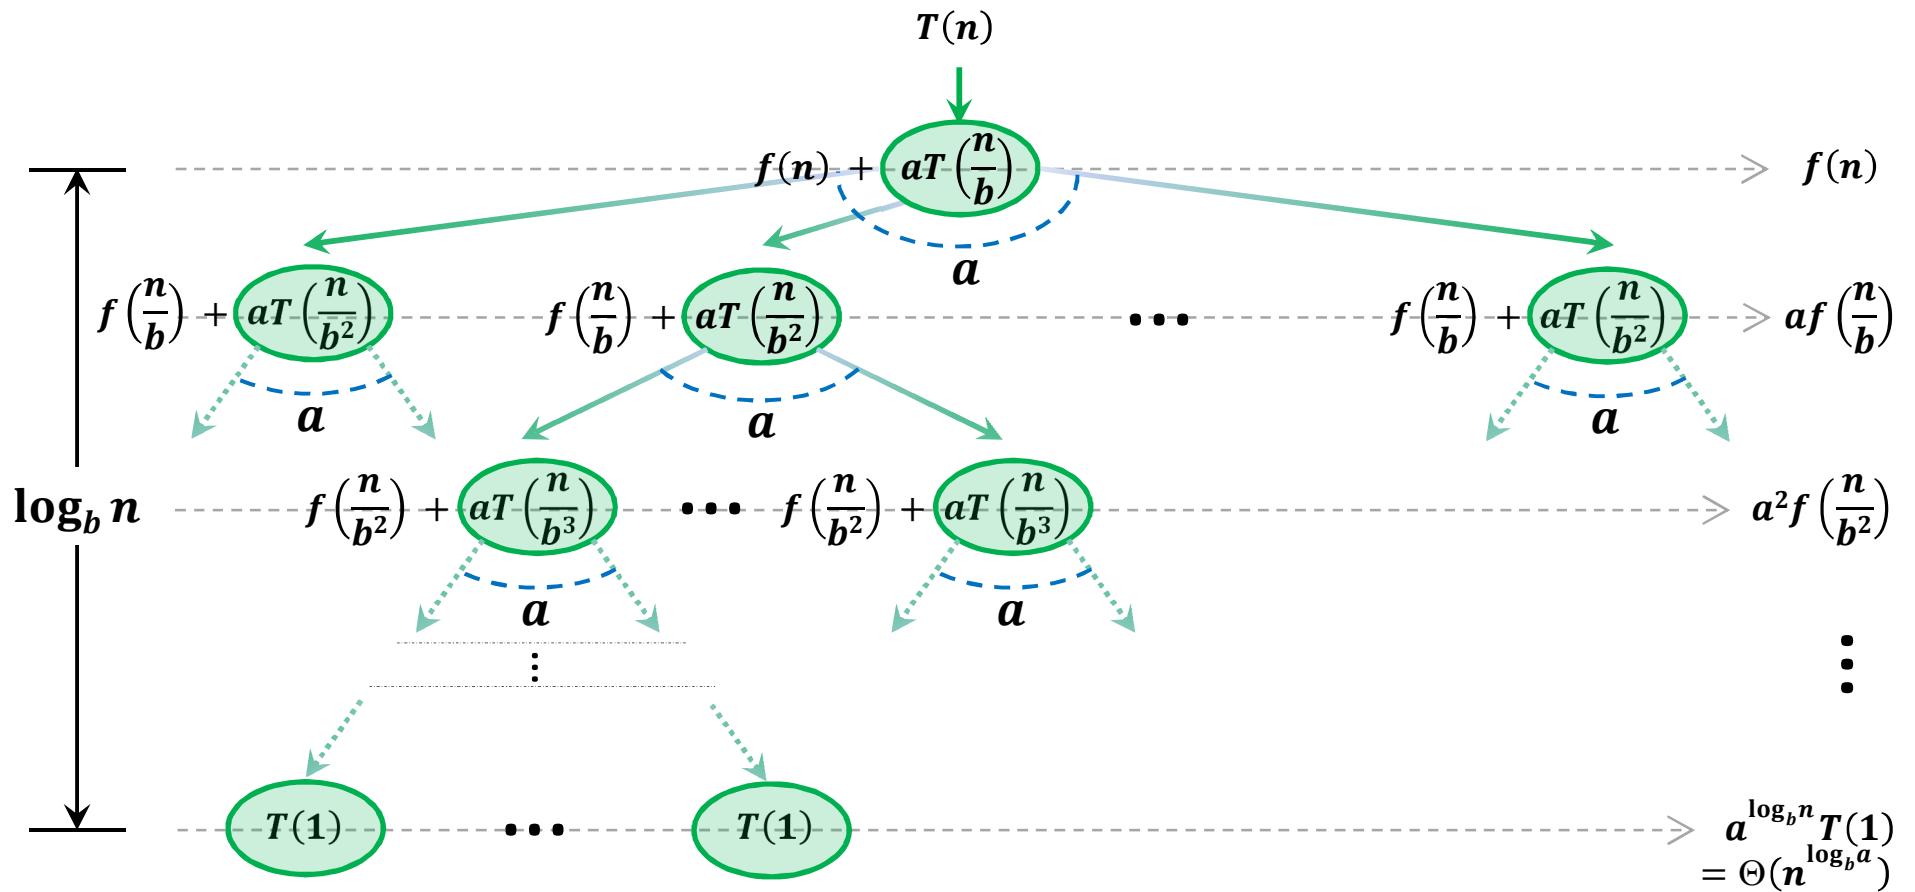

# How the Recurrence Unfolds: Case 1


$$T(n) = \begin{cases} \Theta(1), & \text{if } n \leq 1, \\ aT\left(\frac{n}{b}\right) + f(n), & \text{otherwise.} \end{cases}$$

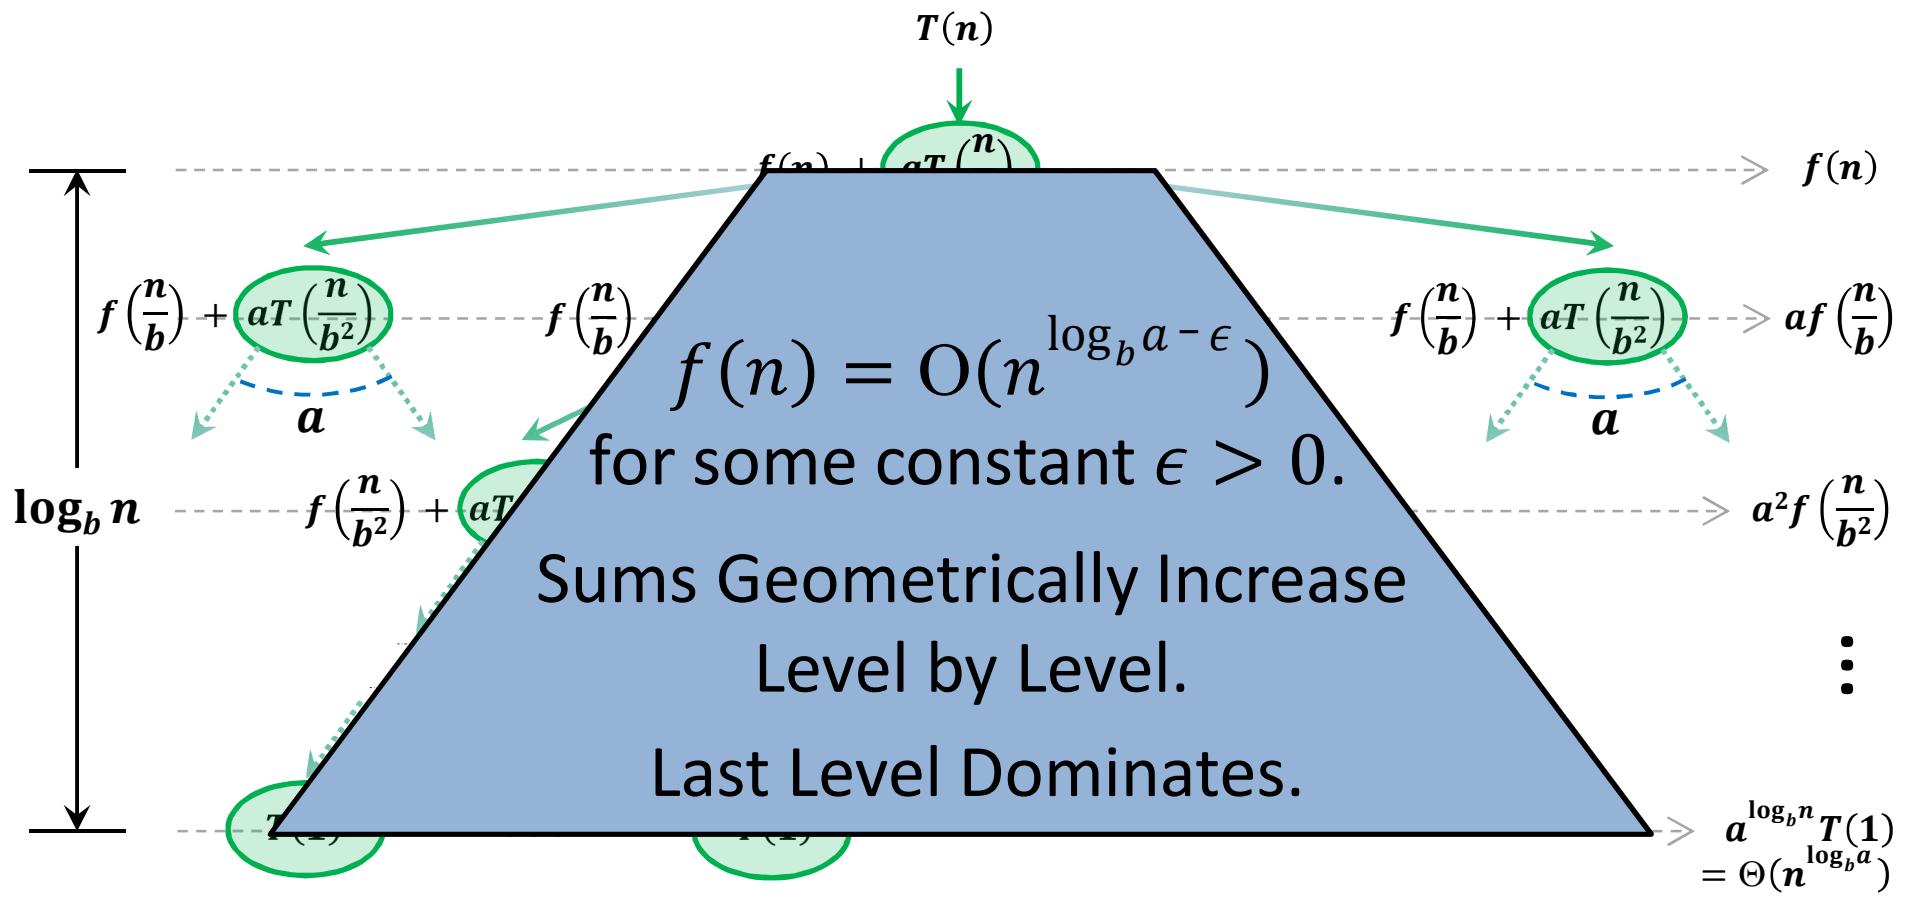

$$T(n) = \Theta(n^{\log_b a})$$


## How the Recurrence Unfolds: Case 2

$$T(n) = \begin{cases} \Theta(1), & \text{if } n \leq 1, \\ aT\left(\frac{n}{b}\right) + f(n), & \text{otherwise.} \end{cases}$$

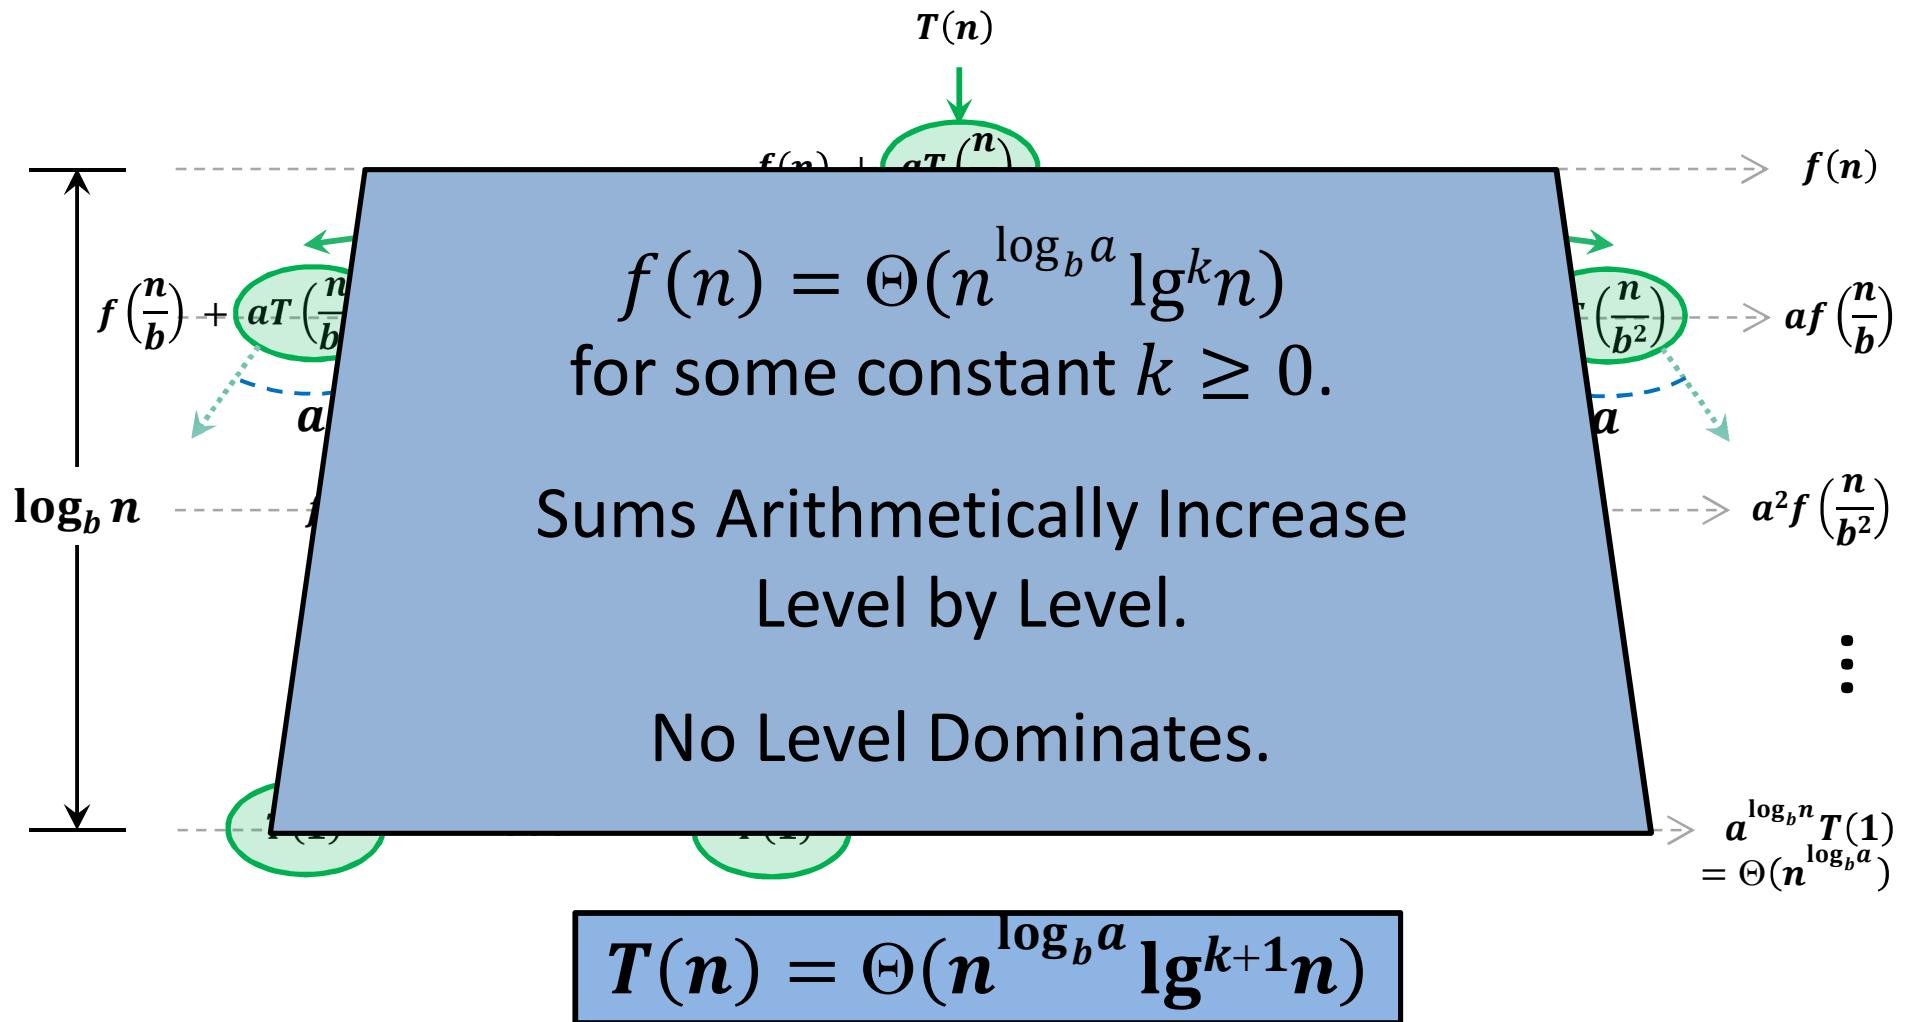

## How the Recurrence Unfolds: Case 3

$$T(n) = \begin{cases} \Theta(1), & \text{if } n \leq 1, \\ aT\left(\frac{n}{b}\right) + f(n), & \text{otherwise.} \end{cases}$$

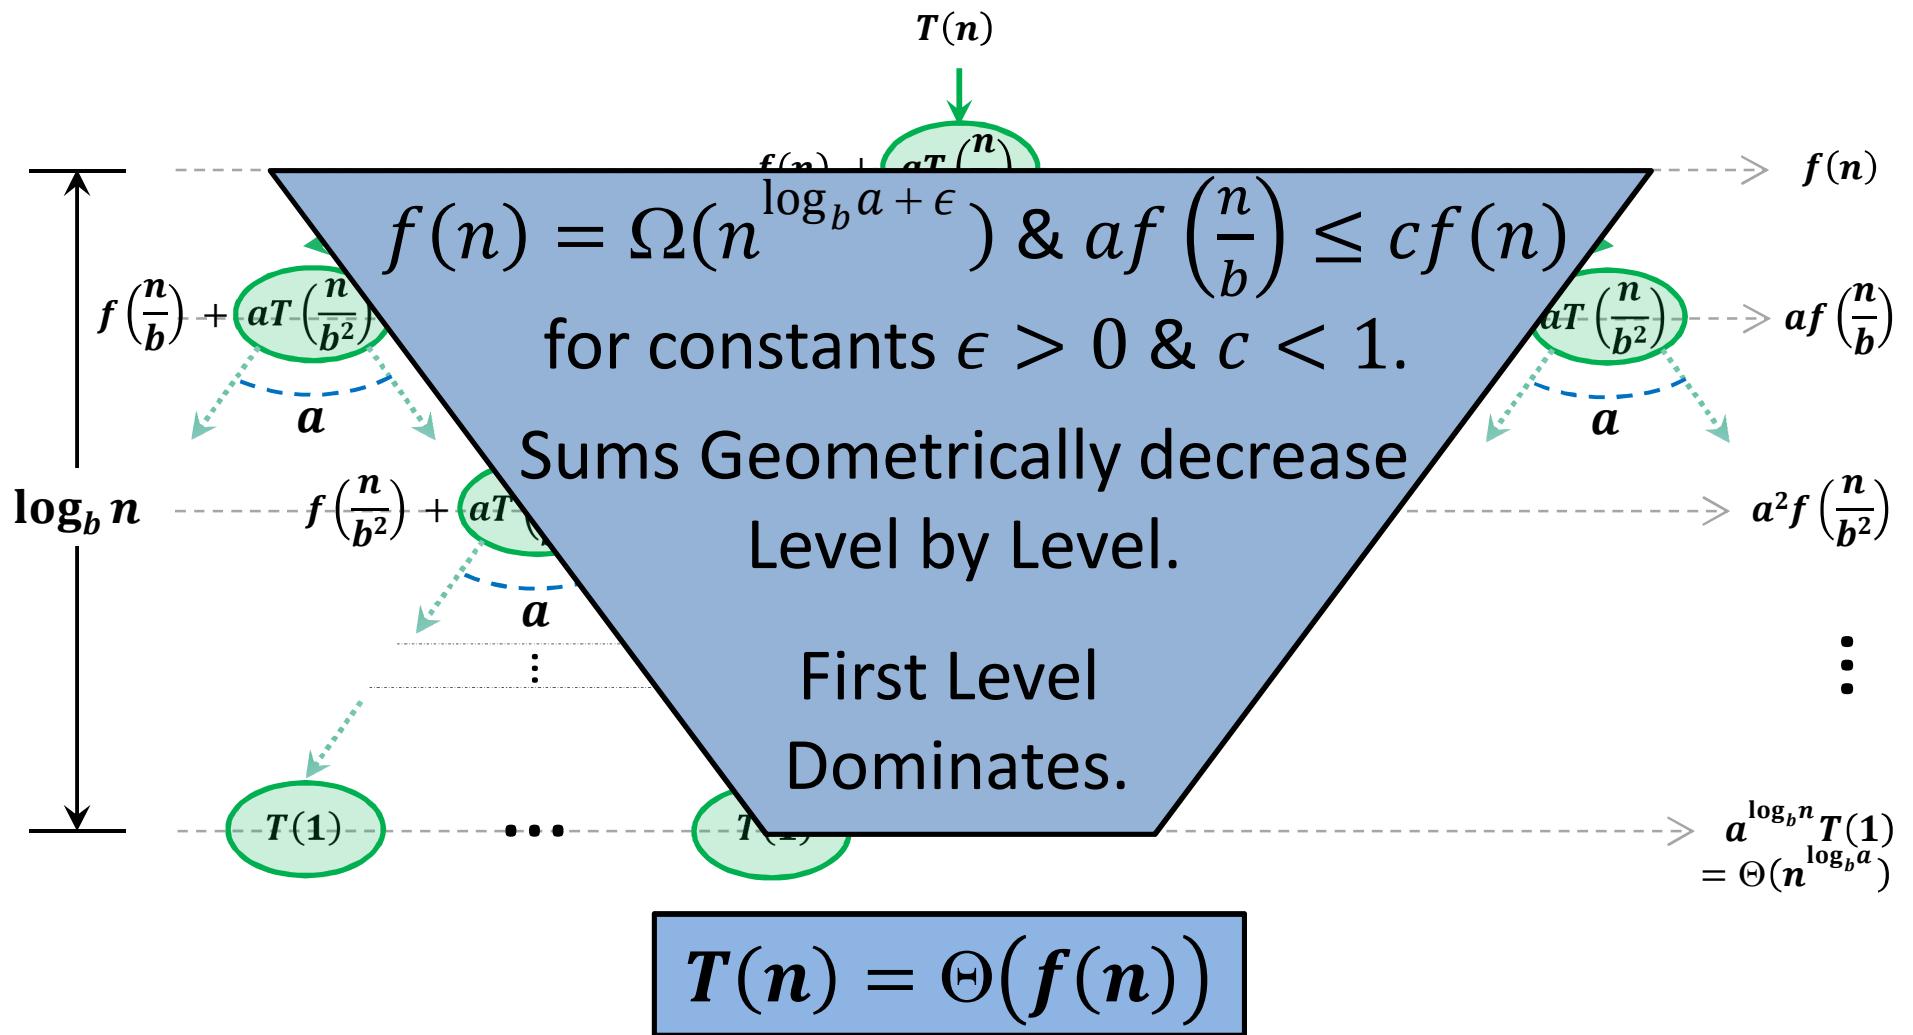

## The Master Theorem

$$T(n) = \begin{cases} \Theta(1), & \text{if } n \leq 1, \\ aT\left(\frac{n}{b}\right) + f(n), & \text{otherwise } (a \geq 1, b > 1). \end{cases}$$

**Case 1:**  $f(n) = O(n^{\log_b a - \epsilon})$  for some constant  $\epsilon > 0$

$$T(n) = \Theta(n^{\log_b a})$$

**Case 2:**  $f(n) = \Theta(n^{\log_b a} \lg^k n)$  for some constant  $k \geq 0$ .

$$T(n) = \Theta(n^{\log_b a} \lg^{k+1} n)$$

**Case 3:**  $f(n) = \Omega(n^{\log_b a + \epsilon})$  and  $af\left(\frac{n}{b}\right) \leq cf(n)$   
for constants  $\epsilon > 0$  and  $c < 1$ .

$$T(n) = \Theta(f(n))$$

## Back to QSort Complexities

Now let's try the QSort (quicksort) recurrences from lecture 1.

**Serial:**  $T(n) = 2T\left(\frac{n}{2}\right) + \Theta(n)$

Master Theorem Case 2:  $T(n) = \Theta(n \log n)$

**Parallel (with serial partition):**  $T(n) = T\left(\frac{n}{2}\right) + \Theta(n)$

Master Theorem Case 3:  $T(n) = \Theta(n)$

**Parallel (with parallel partition):**  $T(n) = T\left(\frac{n}{2}\right) + \Theta(\log n)$

Master Theorem Case 2:  $T(n) = \Theta(\log^2 n)$


# **Multithreaded Matrix Multiplication**

# Parallel Iterative MM

*Iter-MM ( Z, X, Y )*

{  $X, Y, Z$  are  $n \times n$  matrices,  
where  $n$  is a positive integer }

1. *for*  $i \leftarrow 1$  *to*  $n$  *do*
2.     *for*  $j \leftarrow 1$  *to*  $n$  *do*
3.          $Z[i][j] \leftarrow 0$
4.     *for*  $k \leftarrow 1$  *to*  $n$  *do*
5.          $Z[i][j] \leftarrow Z[i][j] + X[i][k] \cdot Y[k][j]$



*Par-Iter-MM ( Z, X, Y )*

{  $X, Y, Z$  are  $n \times n$  matrices,  
where  $n$  is a positive integer }

1. *parallel for*  $i \leftarrow 1$  *to*  $n$  *do*
2.     *parallel for*  $j \leftarrow 1$  *to*  $n$  *do*
3.          $Z[i][j] \leftarrow 0$
4.     *for*  $k \leftarrow 1$  *to*  $n$  *do*
5.          $Z[i][j] \leftarrow Z[i][j] + X[i][k] \cdot Y[k][j]$

# Parallel Iterative MM

*Par-Iter-MM ( Z, X, Y ) { X, Y, Z are  $n \times n$  matrices,  
where n is a positive integer }*


1. *parallel for*  $i \leftarrow 1$  *to*  $n$  *do*
2.     *parallel for*  $j \leftarrow 1$  *to*  $n$  *do*
3.          $Z[ i ][ j ] \leftarrow 0$
4.         *for*  $k \leftarrow 1$  *to*  $n$  *do*
5.              $Z[ i ][ j ] \leftarrow Z[ i ][ j ] + X[ i ][ k ] \cdot Y[ k ][ j ]$

**Work:**  $T_1(n) = \Theta(n^3)$

**Span:**  $T_\infty(n) = \Theta(\log n + \log n + n) = \Theta(n)$

**Parallelism:**  $\frac{T_1(n)}{T_\infty(n)} = \Theta(n^2)$

# Parallel Recursive MM

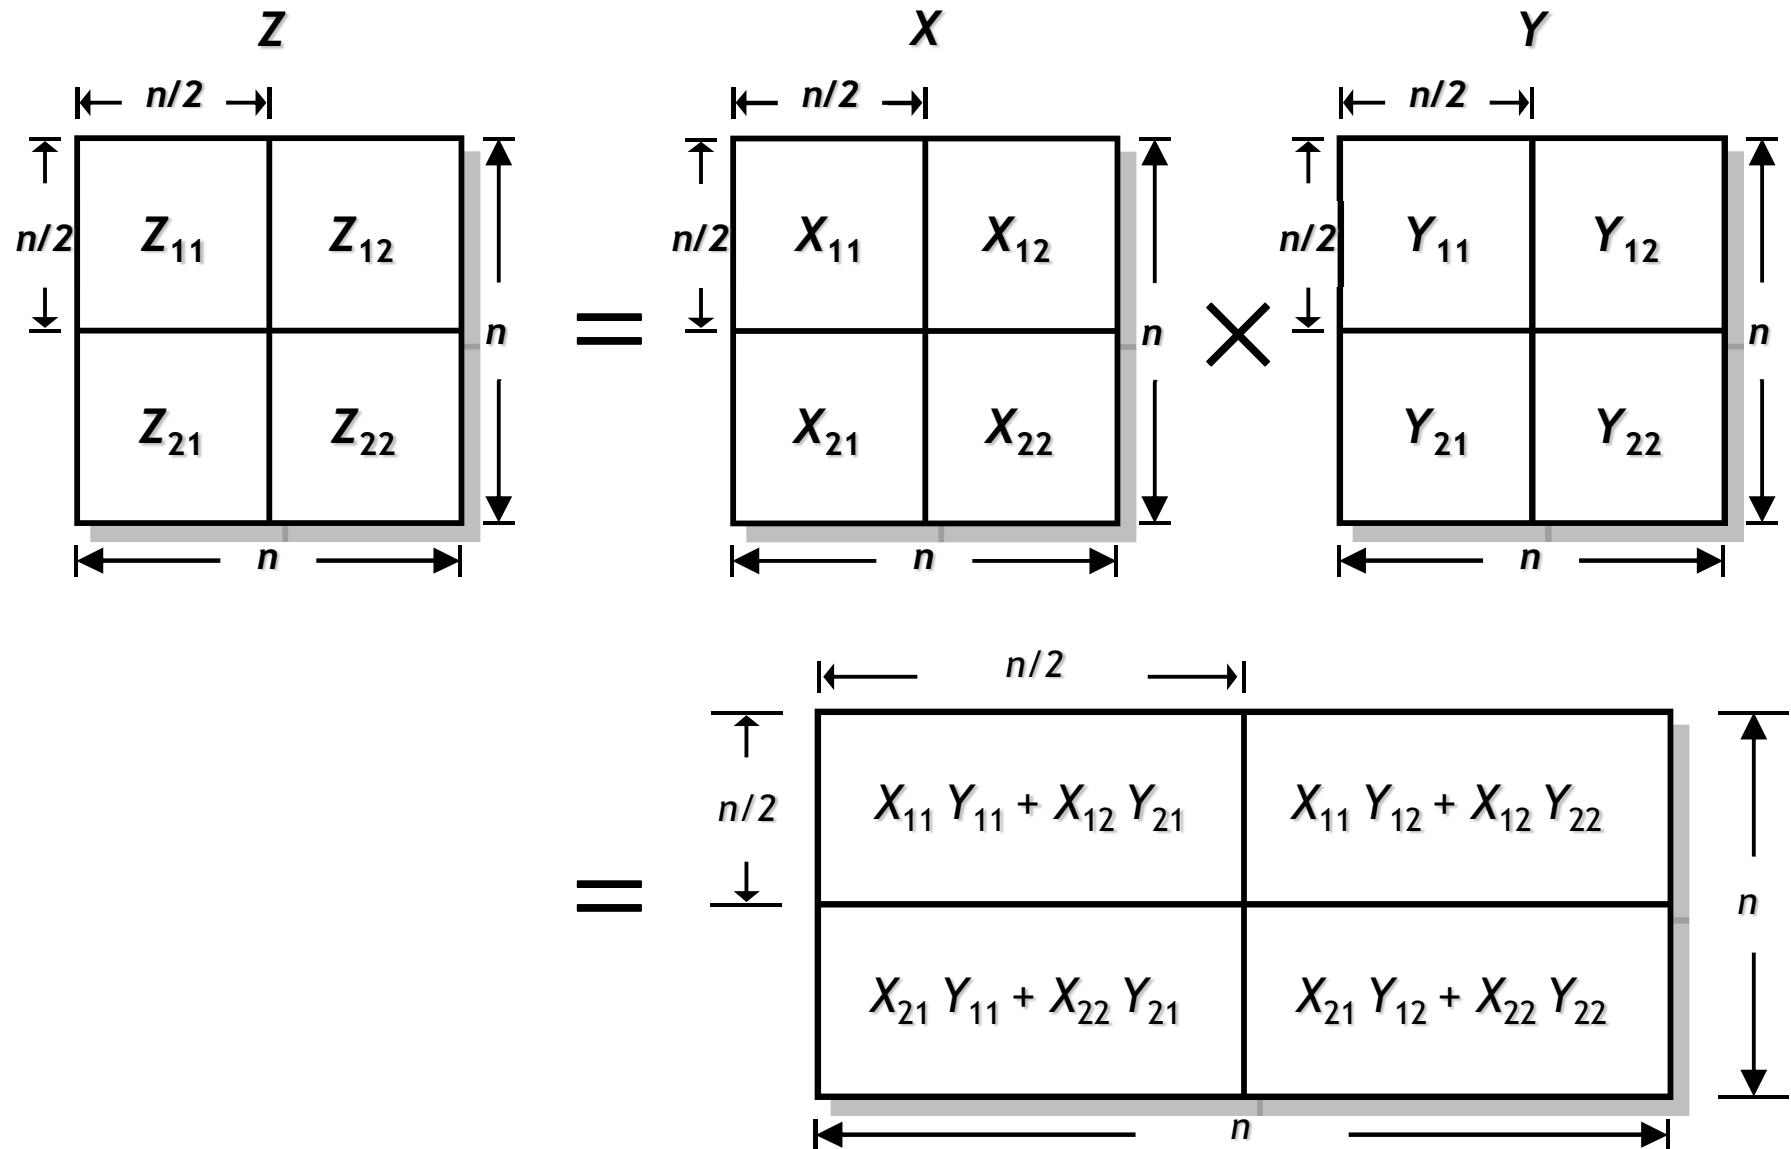

# Parallel Recursive MM

*Par-Rec-MM ( Z, X, Y ) { X, Y, Z are  $n \times n$  matrices,  
where  $n = 2^k$  for integer  $k \geq 0$  }*

1. *if*  $n = 1$  *then*
2.      $Z \leftarrow Z + X \cdot Y$
3. *else*
4.     *spawn Par-Rec-MM (  $Z_{11}$ ,  $X_{11}$ ,  $Y_{11}$  )*
5.     *spawn Par-Rec-MM (  $Z_{12}$ ,  $X_{11}$ ,  $Y_{12}$  )*
6.     *spawn Par-Rec-MM (  $Z_{21}$ ,  $X_{21}$ ,  $Y_{11}$  )*
7.         *Par-Rec-MM (  $Z_{21}$ ,  $X_{21}$ ,  $Y_{12}$  )*
8.     *sync*
9.     *spawn Par-Rec-MM (  $Z_{11}$ ,  $X_{12}$ ,  $Y_{21}$  )*
10.    *spawn Par-Rec-MM (  $Z_{12}$ ,  $X_{12}$ ,  $Y_{22}$  )*
11.    *spawn Par-Rec-MM (  $Z_{21}$ ,  $X_{22}$ ,  $Y_{21}$  )*
12.         *Par-Rec-MM (  $Z_{22}$ ,  $X_{22}$ ,  $Y_{22}$  )*
13.     *sync*
14. *endif*

# Parallel Recursive MM

Par-Rec-MM (  $Z, X, Y$  )    {  $X, Y, Z$  are  $n \times n$  matrices,  
where  $n = 2^k$  for integer  $k \geq 0$  }

1. *if*  $n = 1$  *then*
2.     $Z \leftarrow Z + X \cdot Y$
3. *else*
4.    *spawn Par-Rec-MM (  $Z_{11}, X_{11}, Y_{11}$  )*
5.    *spawn Par-Rec-MM (  $Z_{12}, X_{11}, Y_{12}$  )*
6.    *spawn Par-Rec-MM (  $Z_{21}, X_{21}, Y_{11}$  )*
7.       *Par-Rec-MM (  $Z_{21}, X_{21}, Y_{12}$  )*
8.    *sync*
9.    *spawn Par-Rec-MM (  $Z_{11}, X_{12}, Y_{21}$  )*
10.    *spawn Par-Rec-MM (  $Z_{12}, X_{12}, Y_{22}$  )*
11.    *spawn Par-Rec-MM (  $Z_{21}, X_{22}, Y_{21}$  )*
12.       *Par-Rec-MM (  $Z_{22}, X_{22}, Y_{22}$  )*
13.    *sync*
14. *endif*

Work:

$$T_1(n) = \begin{cases} \Theta(1), & \text{if } n = 1, \\ 8T_1\left(\frac{n}{2}\right) + \Theta(1), & \text{otherwise.} \end{cases}$$
$$= \Theta(n^3) \quad [ \text{MT Case 1} ]$$

Span:


$$T_\infty(n) = \begin{cases} \Theta(1), & \text{if } n = 1, \\ 2T_\infty\left(\frac{n}{2}\right) + \Theta(1), & \text{otherwise.} \end{cases}$$
$$= \Theta(n) \quad [ \text{MT Case 1} ]$$

Parallelism:  $\frac{T_1(n)}{T_\infty(n)} = \Theta(n^2)$

Additional Space:

$$s_\infty(n) = \Theta(1)$$

# Recursive MM with More Parallelism

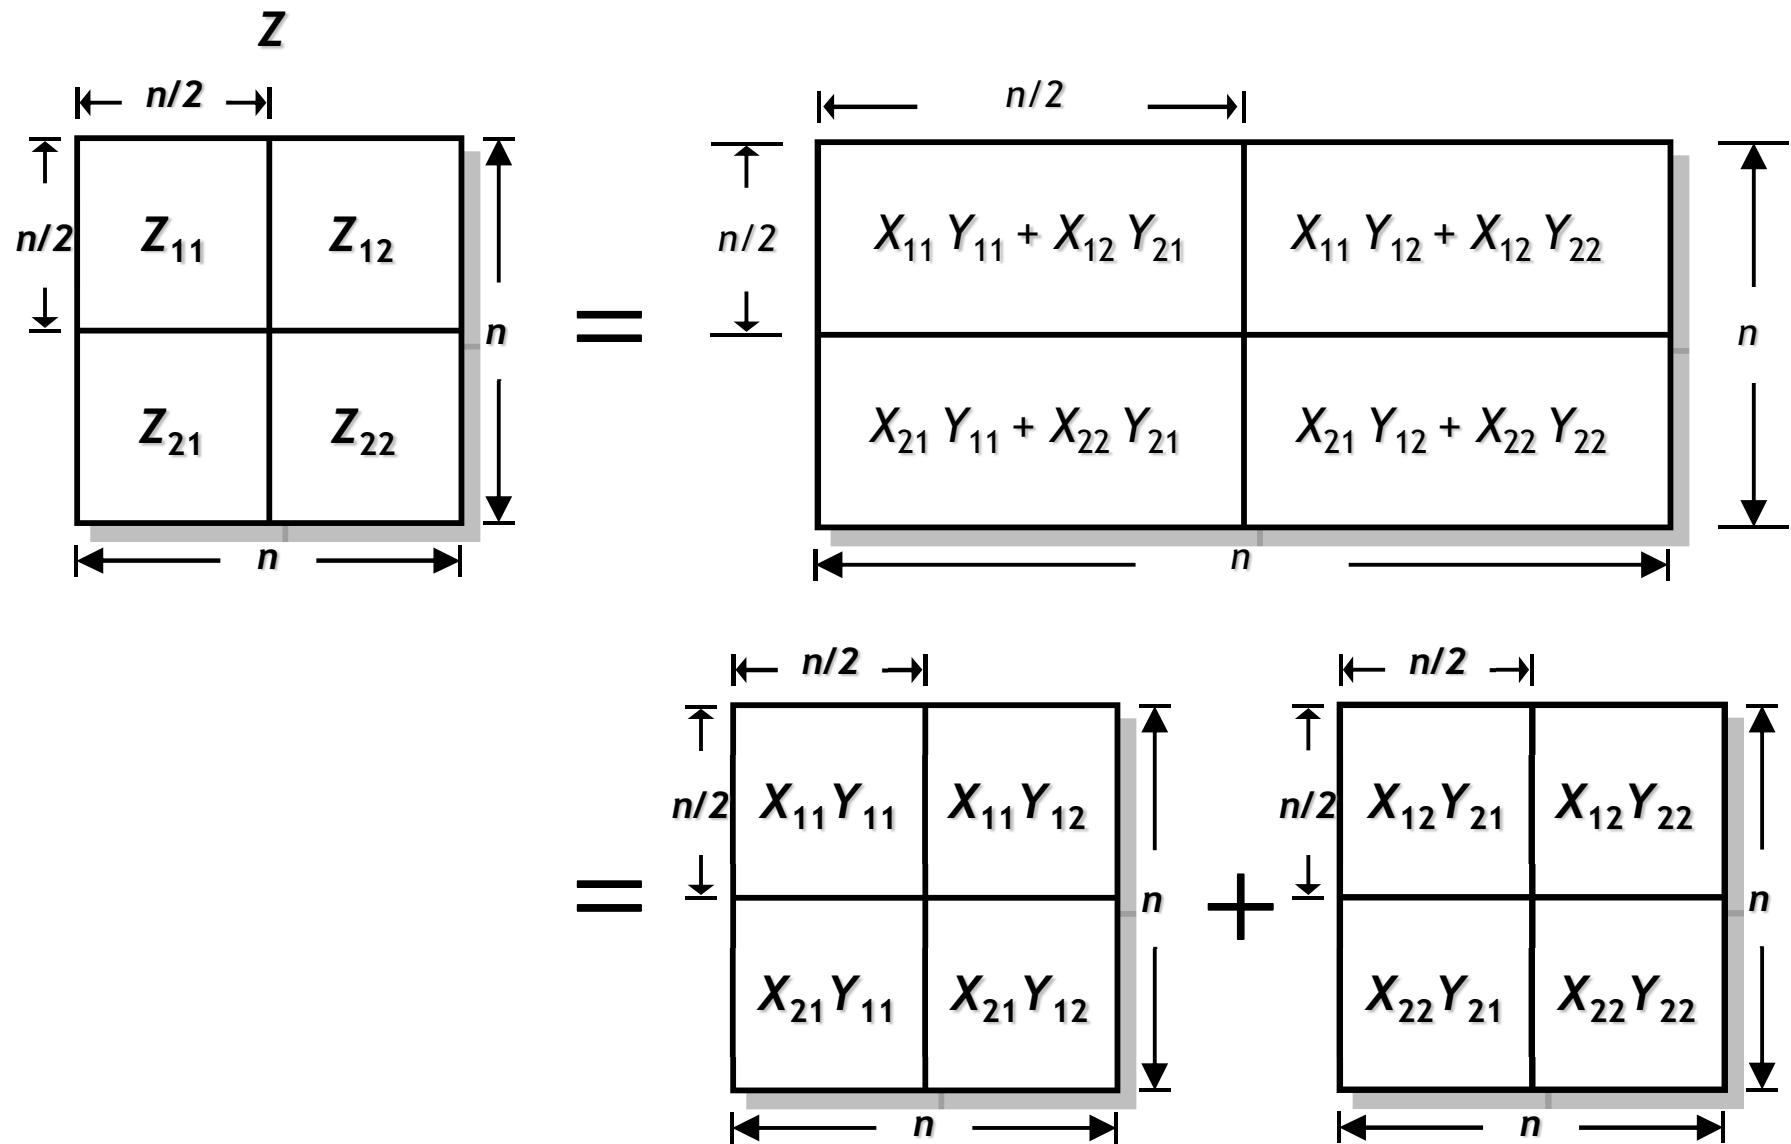

# Recursive MM with More Parallelism

*Par-Rec-MM2 ( Z, X, Y ) { X, Y, Z are  $n \times n$  matrices,  
where  $n = 2^k$  for integer  $k \geq 0$  }*

1. *if*  $n = 1$  *then*
2.    $Z \leftarrow Z + X \cdot Y$
3. *else*       {  $T$  is a temporary  $n \times n$  matrix }
4.   *spawn Par-Rec-MM2 (  $Z_{11}$ ,  $X_{11}$ ,  $Y_{11}$  )*
5.   *spawn Par-Rec-MM2 (  $Z_{12}$ ,  $X_{11}$ ,  $Y_{12}$  )*
6.   *spawn Par-Rec-MM2 (  $Z_{21}$ ,  $X_{21}$ ,  $Y_{11}$  )*
7.   *spawn Par-Rec-MM2 (  $Z_{21}$ ,  $X_{21}$ ,  $Y_{12}$  )*
8.   *spawn Par-Rec-MM2 (  $T_{11}$ ,  $X_{12}$ ,  $Y_{21}$  )*
9.   *spawn Par-Rec-MM2 (  $T_{12}$ ,  $X_{12}$ ,  $Y_{22}$  )*
10.   *spawn Par-Rec-MM2 (  $T_{21}$ ,  $X_{22}$ ,  $Y_{21}$  )*
11.       *Par-Rec-MM2 (  $T_{22}$ ,  $X_{22}$ ,  $Y_{22}$  )*
12.   *sync*
13.   *parallel for*  $i \leftarrow 1$  *to*  $n$  *do*
14.       *parallel for*  $j \leftarrow 1$  *to*  $n$  *do*
15.          $Z[ i ][ j ] \leftarrow Z[ i ][ j ] + T[ i ][ j ]$
16.   *endif*

# Recursive MM with More Parallelism

**Par-Rec-MM2 (  $Z, X, Y$  )** {  $X, Y, Z$  are  $n \times n$  matrices,  
where  $n = 2^k$  for integer  $k \geq 0$  }

1. *if*  $n = 1$  *then*
2.    $Z \leftarrow Z + X \cdot Y$
3. *else*   {  $T$  is a temporary  $n \times n$  matrix }
4.   *spawn Par-Rec-MM2 (  $Z_{11}, X_{11}, Y_{11}$  )*
5.   *spawn Par-Rec-MM2 (  $Z_{12}, X_{11}, Y_{12}$  )*
6.   *spawn Par-Rec-MM2 (  $Z_{21}, X_{21}, Y_{11}$  )*
7.   *spawn Par-Rec-MM2 (  $Z_{21}, X_{21}, Y_{12}$  )*
8.   *spawn Par-Rec-MM2 (  $T_{11}, X_{12}, Y_{21}$  )*
9.   *spawn Par-Rec-MM2 (  $T_{12}, X_{12}, Y_{22}$  )*
10.   *spawn Par-Rec-MM2 (  $T_{21}, X_{22}, Y_{21}$  )*
11.    *Par-Rec-MM2 (  $T_{22}, X_{22}, Y_{22}$  )*
12.   *sync*
13.   *parallel for*  $i \leftarrow 1$  *to*  $n$  *do*
14.     *parallel for*  $j \leftarrow 1$  *to*  $n$  *do*
15.        $Z[ i ][ j ] \leftarrow Z[ i ][ j ] + T[ i ][ j ]$
16.   *endif*

**Work:**

$$T_1(n) = \begin{cases} \Theta(1), & \text{if } n = 1, \\ 8T_1\left(\frac{n}{2}\right) + \Theta(n^2), & \text{otherwise.} \end{cases}$$

$$= \Theta(n^3) \quad [ \text{MT Case 1} ]$$

**Span:**

$$T_\infty(n) = \begin{cases} \Theta(1), & \text{if } n = 1, \\ T_\infty\left(\frac{n}{2}\right) + \Theta(\log n), & \text{otherwise.} \end{cases}$$

$$= \Theta(\log^2 n) \quad [ \text{MT Case 2} ]$$

**Parallelism:**  $\frac{T_1(n)}{T_\infty(n)} = \Theta\left(\frac{n^3}{\log^2 n}\right)$

**Additional Space:**

$$s_\infty(n) = \begin{cases} \Theta(1), & \text{if } n = 1, \\ 8s_\infty\left(\frac{n}{2}\right) + \Theta(n^2), & \text{otherwise.} \end{cases}$$


$$= \Theta(n^3) \quad [ \text{MT Case 1} ]$$

# **Multithreaded Merge Sort**

# Parallel Merge Sort

*Merge-Sort ( A, p, r ) { sort the elements in A[ p ... r ] }*

1. *if*  $p < r$  *then*
2.      $q \leftarrow \lfloor (p + r) / 2 \rfloor$
3.     *Merge-Sort ( A, p, q )*
4.     *Merge-Sort ( A, q + 1, r )*
5.     *Merge ( A, p, q, r )*



*Par-Merge-Sort ( A, p, r ) { sort the elements in A[ p ... r ] }*

1. *if*  $p < r$  *then*
2.      $q \leftarrow \lfloor (p + r) / 2 \rfloor$
3.     *spawn Merge-Sort ( A, p, q )*
4.         *Merge-Sort ( A, q + 1, r )*
5.     *sync*
6.     *Merge ( A, p, q, r )*

# Parallel Merge Sort

*Par-Merge-Sort ( A, p, r ) { sort the elements in A[ p ... r ] }*

1. *if*  $p < r$  *then*
2.    $q \leftarrow \lfloor (p + r) / 2 \rfloor$
3.   *spawn* *Merge-Sort* ( A, p, q )
4.       *Merge-Sort* ( A, q + 1, r )
5.   *sync*
6.   *Merge* ( A, p, q, r )

**Work:**  $T_1(n) = \begin{cases} \Theta(1), & \text{if } n = 1, \\ 2T_1\left(\frac{n}{2}\right) + \Theta(n), & \text{otherwise.} \end{cases}$

$$= \Theta(n \log n) \quad [ \text{MT Case 2} ]$$

**Span:**  $T_\infty(n) = \begin{cases} \Theta(1), & \text{if } n = 1, \\ T_\infty\left(\frac{n}{2}\right) + \Theta(n), & \text{otherwise.} \end{cases}$

$$= \Theta(n) \quad [ \text{MT Case 3} ]$$

**Parallelism:**  $\frac{T_1(n)}{T_\infty(n)} = \Theta(\log n)$

# Parallel Merge


$$n_1 = r_1 - p_1 + 1$$

$$n_2 = r_2 - p_2 + 1$$


subarrays to merge:

$$T[p_1..r_1]$$

$$T[p_2..r_2]$$

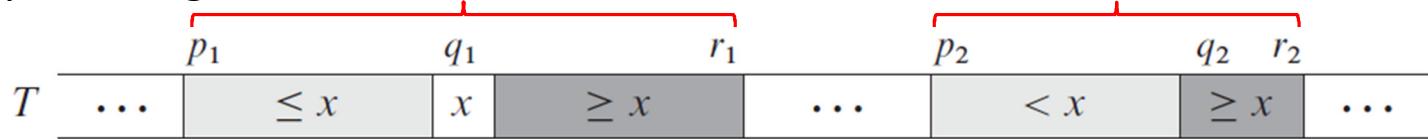

suppose:  $n_1 \geq n_2$

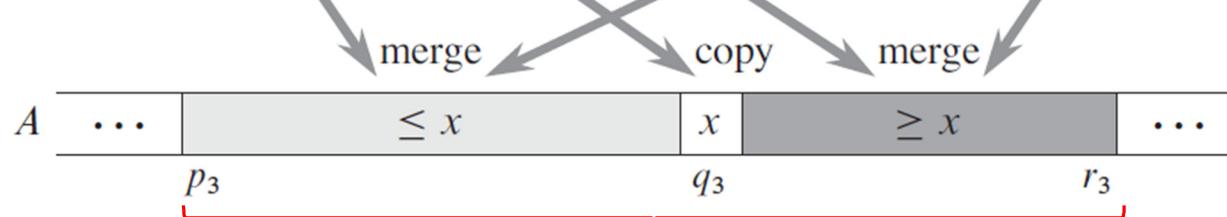

merged output:

$$A[p_3..r_3]$$

$$n_3 = r_3 - p_3 + 1 = n_1 + n_2$$


Source: Cormen et al.,  
"Introduction to Algorithms",  
3rd Edition

# Parallel Merge

$$n_1 = r_1 - p_1 + 1$$

$$n_2 = r_2 - p_2 + 1$$

subarrays to merge:

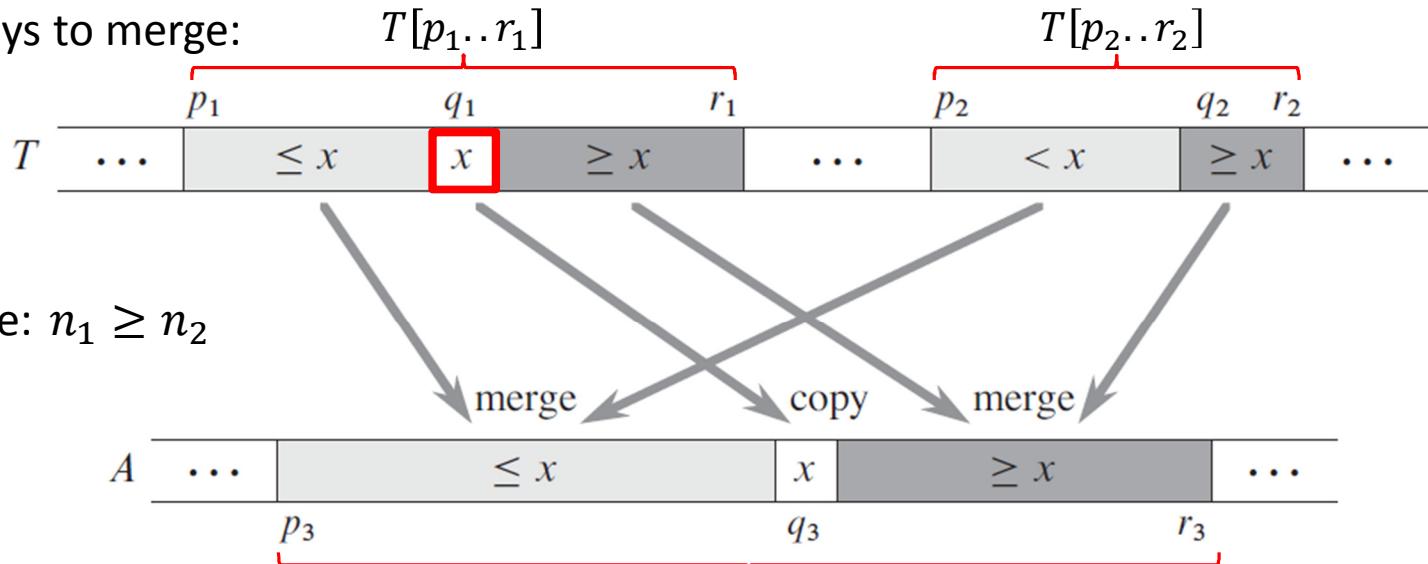

merged output:

$$A[p_3..r_3]$$

$$n_3 = r_3 - p_3 + 1 = n_1 + n_2$$

Source: Cormen et al.,  
"Introduction to Algorithms",  
3rd Edition

**Step 1:** Find  $x = T[q_1]$ , where  $q_1$  is the midpoint of  $T[p_1..r_1]$

# Parallel Merge

$$n_1 = r_1 - p_1 + 1$$


subarrays to merge:

$$T[p_1..r_1]$$

$$n_2 = r_2 - p_2 + 1$$

$$T[p_2..r_2]$$

suppose:  $n_1 \geq n_2$

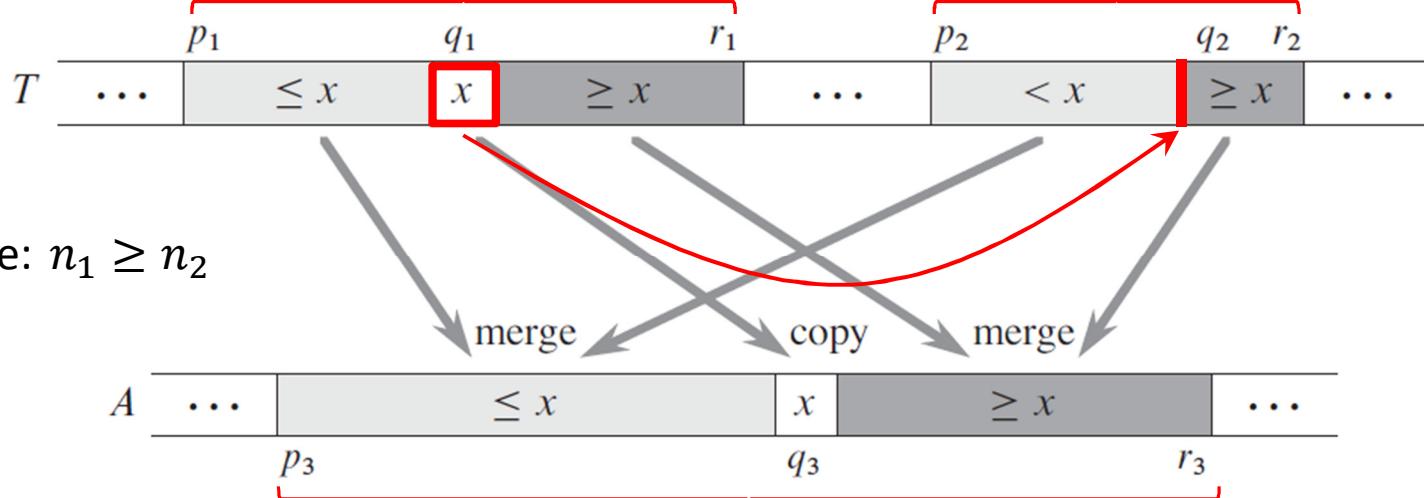

merged output:

$$A[p_3..r_3]$$

$$n_3 = r_3 - p_3 + 1 = n_1 + n_2$$

Source: Cormen et al.,  
"Introduction to Algorithms",  
3rd Edition


**Step 2:** Use binary search to find the index  $q_2$  in subarray  $T[p_2..r_2]$  so that the subarray would still be sorted if we insert  $x$  between  $T[q_2 - 1]$  and  $T[q_2]$

# Parallel Merge


$$n_1 = r_1 - p_1 + 1$$

$$n_2 = r_2 - p_2 + 1$$

subarrays to merge:

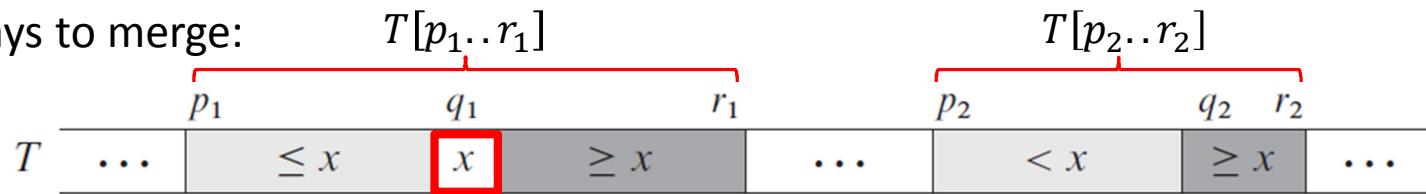

suppose:  $n_1 \geq n_2$

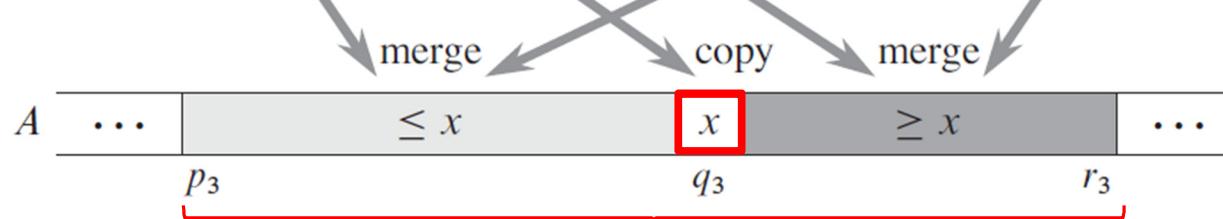

merged output:

$$A[p_3..r_3]$$

$$n_3 = r_3 - p_3 + 1 = n_1 + n_2$$

Source: Cormen et al.,  
"Introduction to Algorithms",  
3rd Edition


**Step 3:** Copy  $x$  to  $A[q_3]$ , where  $q_3 = p_3 + (q_1 - p_1) + (q_2 - p_2)$

# Parallel Merge

$$n_1 = r_1 - p_1 + 1$$

$$n_2 = r_2 - p_2 + 1$$

subarrays to merge:

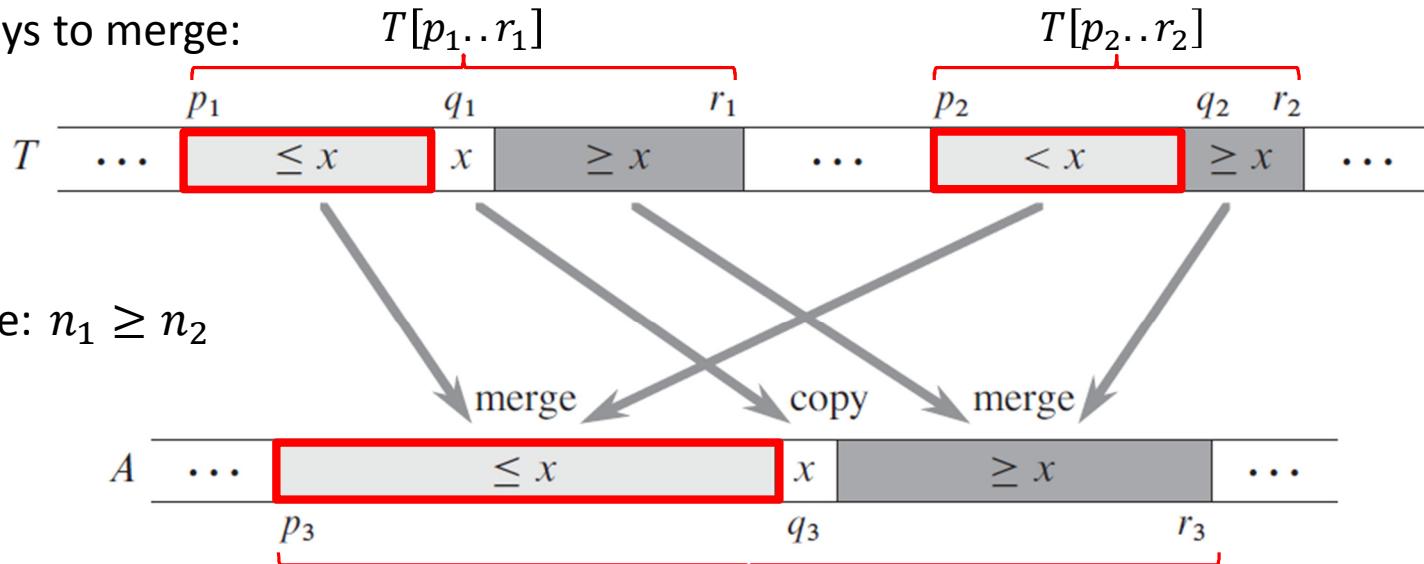

suppose:  $n_1 \geq n_2$

merged output:

$$A[p_3..r_3]$$

$$n_3 = r_3 - p_3 + 1 = n_1 + n_2$$

Source: Cormen et al.,  
"Introduction to Algorithms",  
3rd Edition

Perform the following two steps in parallel.


**Step 4(a):** Recursively merge  $T[p_1..q_1 - 1]$  with  $T[p_2..q_2 - 1]$ ,  
and place the result into  $A[p_3..q_3 - 1]$

# Parallel Merge

$$n_1 = r_1 - p_1 + 1$$

$$n_2 = r_2 - p_2 + 1$$

subarrays to merge:

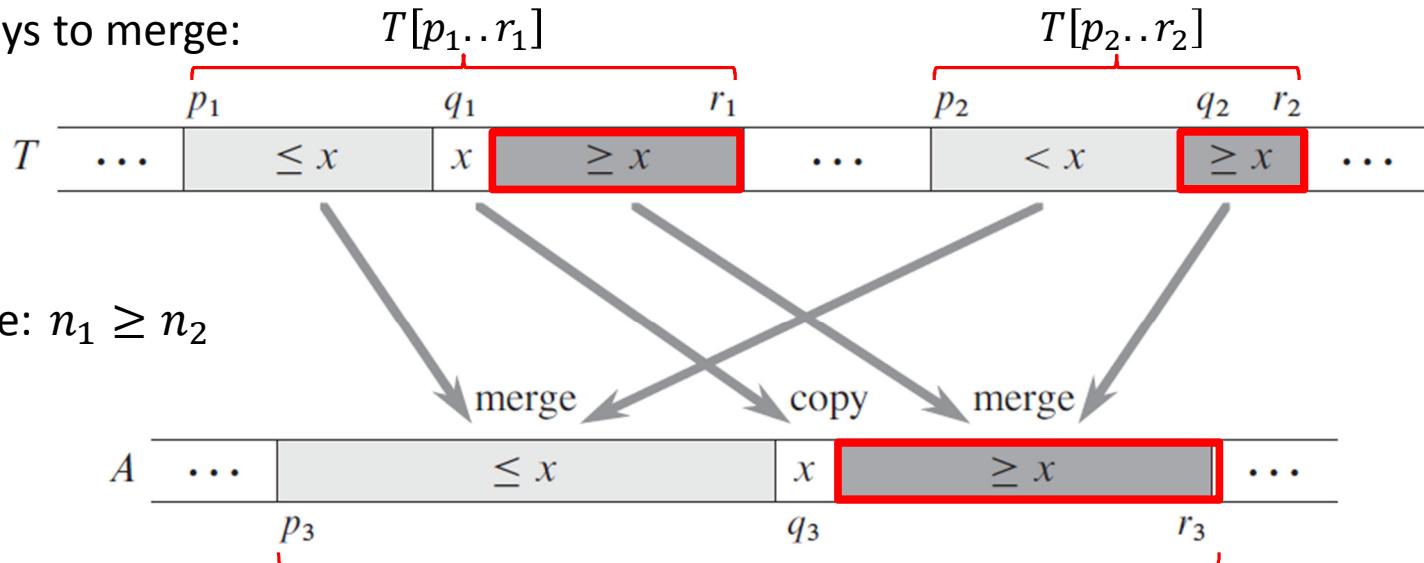

merged output:

$$A[p_3 \dots r_3]$$

$$n_3 = r_3 - p_3 + 1 = n_1 + n_2$$

Perform the following two steps in parallel.

**Step 4(a):** Recursively merge  $T[p_1 \dots q_1 - 1]$  with  $T[p_2 \dots q_2 - 1]$ ,  
and place the result into  $A[p_3 \dots q_3 - 1]$

**Step 4(b):** Recursively merge  $T[q_1 + 1 \dots r_1]$  with  $T[q_2 + 1 \dots r_2]$ ,  
and place the result into  $A[q_3 + 1 \dots r_3]$

Source: Cormen et al.,  
"Introduction to Algorithms",  
3rd Edition

# Parallel Merge

*Par-Merge (  $T, p_1, r_1, p_2, r_2, A, p_3$  )*

1.  $n_1 \leftarrow r_1 - p_1 + 1, \quad n_2 \leftarrow r_2 - p_2 + 1$
2. *if*  $n_1 < n_2$  *then*
3.      $p_1 \leftrightarrow p_2, \quad r_1 \leftrightarrow r_2, \quad n_1 \leftrightarrow n_2$
4. *if*  $n_1 = 0$  *then return*
5. *else*
6.      $q_1 \leftarrow \lfloor (p_1 + r_1) / 2 \rfloor$
7.      $q_2 \leftarrow \text{Binary-Search} ( T[q_1], T, p_2, r_2 )$
8.      $q_3 \leftarrow p_3 + (q_1 - p_1) + (q_2 - p_2)$
9.      $A[q_3] \leftarrow T[q_1]$
10.    *spawn Par-Merge (  $T, p_1, q_1-1, p_2, q_2-1, A, p_3$  )*
11.       *Par-Merge (  $T, q_1+1, r_1, q_2+1, r_2, A, q_3+1$  )*
12.    *sync*

# Parallel Merge

*Par-Merge* (  $T, p_1, r_1, p_2, r_2, A, p_3$  )

1.  $n_1 \leftarrow r_1 - p_1 + 1, n_2 \leftarrow r_2 - p_2 + 1$
2. *if*  $n_1 < n_2$  *then*
3.    $p_1 \leftrightarrow p_2, r_1 \leftrightarrow r_2, n_1 \leftrightarrow n_2$
4. *if*  $n_1 = 0$  *then return*
5. *else*
6.    $q_1 \leftarrow \lfloor (p_1 + r_1) / 2 \rfloor$
7.    $q_2 \leftarrow \text{Binary-Search} ( T[q_1], T, p_2, r_2 )$
8.    $q_3 \leftarrow p_3 + (q_1 - p_1) + (q_2 - p_2)$
9.    $A[q_3] \leftarrow T[q_1]$
10.   *spawn Par-Merge* (  $T, p_1, q_1-1, p_2, q_2-1, A, p_3$  )
11.       *Par-Merge* (  $T, q_1+1, r_1, q_2+1, r_2, A, q_3+1$  )
12.   *sync*

We have,

$$n_2 \leq n_1 \Rightarrow 2n_2 \leq n_1 + n_2 = n$$

In the worst case, a recursive call in lines 9-10 merges half the elements of  $T[p_1..r_1]$  with all elements of  $T[p_2..r_2]$ .

Hence, #elements involved in such a call:

$$\left\lfloor \frac{n_1}{2} \right\rfloor + n_2 \leq \frac{n_1}{2} + \frac{n_2}{2} + \frac{n_2}{2} = \frac{n_1 + n_2}{2} + \frac{2n_2}{4} \leq \frac{n}{2} + \frac{n}{4} = \frac{3n}{4}$$

# Parallel Merge

*Par-Merge* (  $T, p_1, r_1, p_2, r_2, A, p_3$  )

1.  $n_1 \leftarrow r_1 - p_1 + 1, n_2 \leftarrow r_2 - p_2 + 1$
2. *if*  $n_1 < n_2$  *then*
3.     $p_1 \leftrightarrow p_2, r_1 \leftrightarrow r_2, n_1 \leftrightarrow n_2$
4. *if*  $n_1 = 0$  *then return*
5. *else*
6.     $q_1 \leftarrow \lfloor (p_1 + r_1) / 2 \rfloor$
7.     $q_2 \leftarrow \text{Binary-Search} ( T[q_1], T, p_2, r_2 )$
8.     $q_3 \leftarrow p_3 + (q_1 - p_1) + (q_2 - p_2)$
9.     $A[q_3] \leftarrow T[q_1]$
10.    *spawn Par-Merge* (  $T, p_1, q_1-1, p_2, q_2-1, A, p_3$  )
11.       *Par-Merge* (  $T, q_1+1, r_1, q_2+1, r_2, A, q_3+1$  )
12.    *sync*

**Span:**

$$T_\infty(n) = \begin{cases} \Theta(1), & \text{if } n = 1, \\ T_\infty\left(\frac{3n}{4}\right) + \Theta(\log n), & \text{otherwise.} \end{cases}$$

$$= \Theta(\log^2 n) \quad [\text{MT Case 2}]$$

**Work:**

Clearly,  $T_1(n) = \Omega(n)$

We show below that,  $T_1(n) = O(n)$

For some  $\alpha \in \left[\frac{1}{4}, \frac{3}{4}\right]$ , we have the following recurrence,

$$T_1(n) = T_1(\alpha n) + T_1((1 - \alpha)n) + O(\log n)$$

Assuming  $T_1(n) \leq c_1 n - c_2 \log n$  for positive constants  $c_1$  and  $c_2$ , and substituting on the right hand side of the above recurrence gives us:  $T_1(n) \leq c_1 n - c_2 \log n = O(n)$ .

Hence,  $T_1(n) = \Theta(n)$ .

# Parallel Merge Sort with Parallel Merge

*Par-Merge-Sort ( A, p, r ) { sort the elements in A[ p ... r ] }*

1. *if*  $p < r$  *then*
2.    $q \leftarrow \lfloor (p + r) / 2 \rfloor$
3.   *spawn* *Merge-Sort* ( A, p, q )
4.       *Merge-Sort* ( A, q + 1, r )
5.   *sync*
6.   *Par-Merge* ( A, p, q, r )

**Work:**  $T_1(n) = \begin{cases} \Theta(1), & \text{if } n = 1, \\ 2T_1\left(\frac{n}{2}\right) + \Theta(n), & \text{otherwise.} \end{cases}$

$$= \Theta(n \log n) \quad [ \text{MT Case 2} ]$$

**Span:**  $T_\infty(n) = \begin{cases} \Theta(1), & \text{if } n = 1, \\ T_\infty\left(\frac{n}{2}\right) + \Theta(\log^2 n), & \text{otherwise.} \end{cases}$

$$= \Theta(\log^3 n) \quad [ \text{MT Case 2} ]$$

**Parallelism:**  $\frac{T_1(n)}{T_\infty(n)} = \Theta\left(\frac{n}{\log^2 n}\right)$